

# Exolon® multi UV 2/4-8

## Multiwall polycarbonate sheet



### Your benefits:

- high impact strength
- lightweight
- cold-bendable

**Exolon multi UV 2/4-8** is a twinwall polycarbonate sheet of 4 mm thickness. The sheet is lightweight, impact resistant and easy to install.

### Applications:

**Exolon multi UV 2/4-8** is used as an advertising display, partition and load-free panel. For load bearing structures (exposed to wind or snow loads), installed flat or as barrel vaults, it is advised to use sheets of greater thickness.


### UV-protection

The sheets are produced with a coextruded UV-protective layer, which is homogeneously fused with the sheet material. This UV-protected side must be installed facing upwards/outwards.

### TECHNICAL DATA (TYPICAL VALUES)

Area weight	0.8 kg/m <sup>2</sup>	
Sheet width	2,100 mm	
Possible delivery lengths	2,000 to 12,000 mm	
Minimum permissible cold-bending radius <sup>(1)</sup>	700 mm	
Light transmittance $\tau_{D65}$ (UV-absorbing) – expected values	clear 1099: white 1146: white 1125:	ca. 84 % ca. 77 % ca. 28 %
Coefficient of thermal expansion $\alpha$	0.065 mm/m °C	
Possible expansion due to heat and moisture	3 mm/m	
Max. service temperature without load	120°C	
Fire rating <sup>(2)</sup> • Europe	all colours	B-s1, d0 (EN 13501-1)

- <sup>(1)</sup> The cold-bending must be parallel to the ribs of the sheets, never crosswise (risk of buckling).  
<sup>(2)</sup> Fire certificates are limited in time and scope, always check if the mentioned certificate is valid for the purchased Polycarbonate sheet type at the date of delivery. Polycarbonate sheets may change their fire behavior due to ageing and weathering. The indicated fire rating was tested on new / unweathered Product in accordance with the indicated fire classification standards.

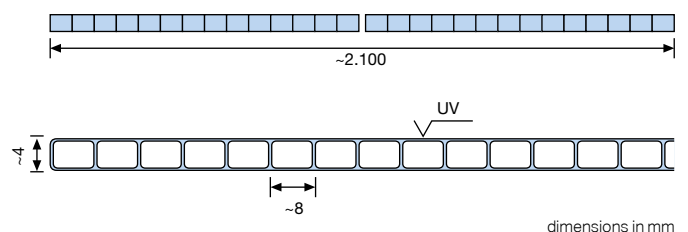

# Exolon® multi UV 2/4-8

## Multiwall polycarbonate sheet



Exolon Group S-Line, the standard product line, represents a range of certified quality products which offer the reliable solution for most applications.

Exolon Group also produces solid sheets in polycarbonate (Exolon® GP) and in polyester (Vivak® and Axpel®). For more information, take a look at [www.exolongroup.com](http://www.exolongroup.com).



Exolon Group S.p.A  
Strada Di Vagno 15/A –  
05035 Nera Montoro (TR)

Italy

[www.exolongroup.com](http://www.exolongroup.com)  
[sales@exolongroup.com](mailto:sales@exolongroup.com)

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, are beyond our control. Therefore, it is imperative that you test our products, technical assistance, information and recommendations to determine to your own satisfaction whether our products, technical assistance and information are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by Exolon Group. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale which are available upon request. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with any claim of any patent relative to any material or its use. No license is implied or in fact granted under the claims of any patent.

Exolon® is a registered trademark of Exolon Group